



44487064

# 900-BB Battery Backup



Installation Instructions

### ⚠ DANGER: ⚠

To avoid risk of electric shock, turn off AC power to power supply before installing or wiring 900-BB board

## BATTERY SPECIFICATIONS


Battery Life	Model PS906 = 6A @ 24V Model PS904 = 4A @ 24V Model PS902 = 2A @ 24V Model PS914 = 4A @ 24V	} Suitable for Canadian Class IV standby power for access control	
Battery Type	12VDC, 7Ah Gel Sealed Rechargeable Battery (2 included) 5 Year Service Life		
Replacement Part Number	Schlage 991280		

### ⚠ CAUTION ⚠

Charge only Schlage 991280 batteries. Other types may burst, causing personal injury and damage. Observe the proper polarity when connecting the batteries.

Refer to installation instructions for compatible supply models - PS902, PS904, PS906, and PS914.

## 1 Install 900-BB onto main circuit board and secure with screw

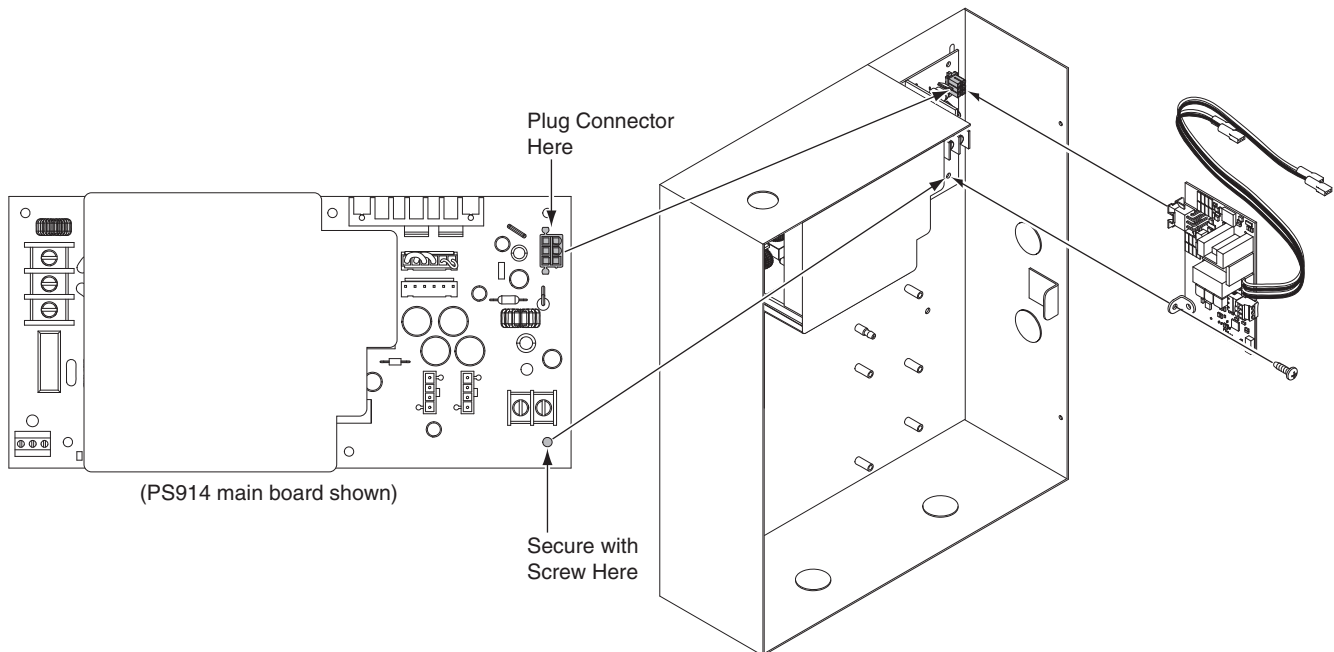

## 2 Install and connect batteries

2a Turn On AC Breaker to Energize Power Supply

2b Place Batteries in Box with Terminals to the Left

2c Attach Wires from Battery Board  
 Red wires = (+)  
 Black wires = (-)

2d Verify That Battery LED is On  
 If LED is not on, cycle AC power off and then back on.


① **Note: Allow 24 hours for batteries to fully charge**



**WARNING**

**Incorrect connection may cause damage to the batteries**

① **Note: when installation is complete, secure enclosure door with screws or keylock.**

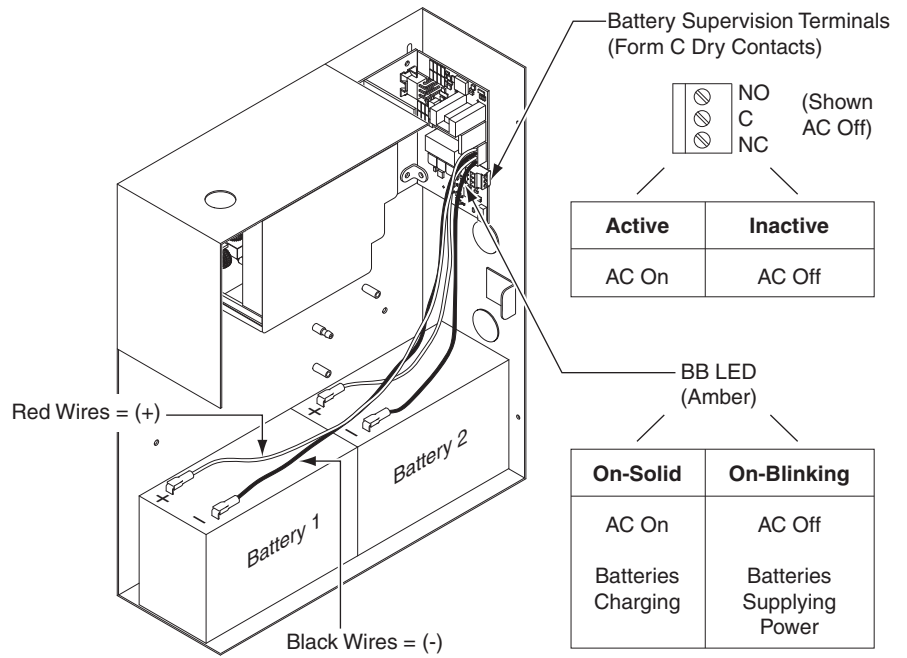

**Customer Service**

1-877-671-7011 [www.allegion.com](http://www.allegion.com)



© Allegion 2014  
 Printed in U.S.A.  
 44487064 Rev. 01/14-b